



PRODUCT SPEC SHEET

1500VDC UL98B 2000 Amp Switches

ASG's 1,500VDC load break disconnect is designed for PV and battery systems that require higher DC voltages and dependable load-break performance.




PRODUCT SPECIFICATIONS

- 2 and 4 pole, 100% load-break
- Ratings from 400 to 2,000 amps
- 10KAIC rating without fuses
- Outdoor rated NEMA 3R, 4 or 4X
- Padlockable enclosure
- Condensate breather vent
- Includes line and load lugs
- Setup for bottom cable feed
- Wall-mount or free-standing versions
- UL98B certification label

WHY ASG POWER?

- Design Engineer Build support for solar power product applications
- Engineering experience for hard-to-find power protection needs
- Built for quality and compliance you can trust with UL98B labeling

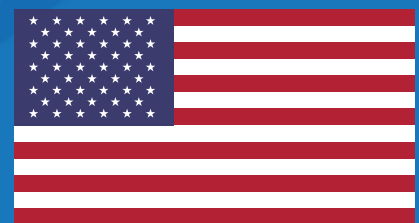

Assembled in the USA